

Primary Filter Series



VICFIL SDN. BHD.
DRIVE INNOVATION

PRODUCT NAME

Washable Panel Filter

SPECIFICATION

Media

Synthetic fibre

Efficiency

G2(≥65%), G3(≥80%), G4(≥90%)

Frame

Aluminium Extrusion

Grid

Galvanised Steel wire

Temperature

≤80°C


Humidity

≤100% RH

Rated Velocity

2.5 m/s

Recommended final pressure drop ≤ 249Pa



SIZE AND PERFORMANCE DATA

Nominal Size WxHxD (In)	Actual Size WxHxD (mm)	Efficiency EN779	Air Flow / Initial Resistance CMH / Pa
12 x 24 x 1/2	287 x 592 x 12	G2	1700 / 45
20 x 24 x 1/2	490 x 592 x 12		2839 / 45
24 x 24 x 1/2	592 x 592 x 12		3400 / 45
12 x 24 x 1	287 x 592 x 21	G3	1700 / 50
20 x 24 x 1	490 x 592 x 21		2839 / 50
24 x 24 x 1	592 x 592 x 21		3400 / 50
12 x 24 x 2	287 x 592 x 46	G4	1700 / 65
20 x 24 x 2	490 x 592 x 46		2839 / 65
24 x 24 x 2	592 x 592 x 46		3400 / 65

Customize size is available.


INTRODUCTION

- These filter are strong, easy to clean and serve to save your cost.

APPLICATION

- Filters are economical and effective solution to industrial air filtration.

AIR FLOW VS INITIAL RESISTANCE

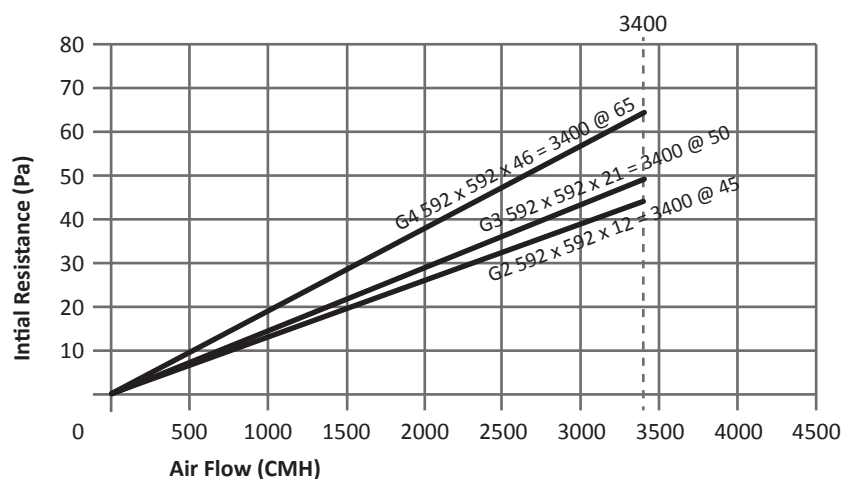

Specification, appearance and content are subject to change without prior notice.