

Primary Filter Series



VICFIL SDN. BHD.
DRIVE INNOVATION

PRODUCT NAME

Extended Surface Pleated Filter (Premium Type)

SPECIFICATION

Media

Synthetic fibre, laminating galvanised steel support grid

Efficiency

G4(≥90%)

Frame

Virgin craft beverage board

Adhesive

Water repellent adhesive

Temperature

≤70°C


Humidity

≤90% RH

Rated Velocity

2.5 m/s

Recommended final pressure drop ≤ 249Pa



SIZE AND PERFORMANCE DATA

Nominal Size WxHxD (In)	Actual Size WxHxD (mm)	Efficiency EN779	Air Flow / Initial Resistance CMH / Pa
12 x 24 x 2	289 x 594 x 44	G4	1700 / 63
20 x 20 x 2	492 x 492 x 44		2380 / 63
20 x 24 x 2	492 x 594 x 44		2839 / 63
24 x 24 x 2	594 x 594 x 44		3400 / 63
12 x 24 x 4	289 x 594 x 95		1700 / 55
20 x 20 x 4	492 x 492 x 95		2380 / 55
20 x 24 x 4	492 x 594 x 95		2839 / 55
24 x 24 x 4	594 x 594 x 95		3400 / 55

INTRODUCTION

- Pleated filter use synthetic media and bonded to a wire mesh on the air leaving side and enclosed into beverage board.


- There are three kind of thickness, 1", 2" and 4" with G4 (≥90%) efficiency.

APPLICATION

- Filter can be used as pre-filters for most demanding filtration system and for extension the life of expensive high efficiency filter.

- Filters can be used in residential, commercial and industrial.

AIR FLOW VS INITIAL RESISTANCE

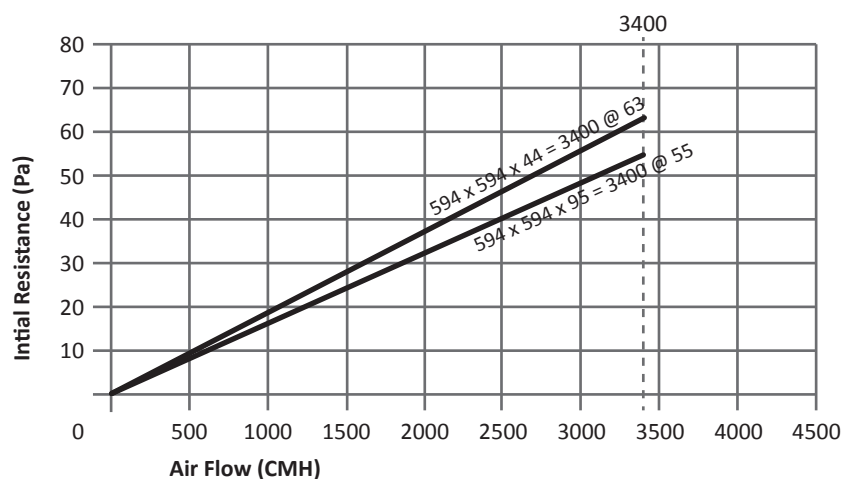

Specification, appearance and content are subject to change without prior notice.